


LM-KS-700-F

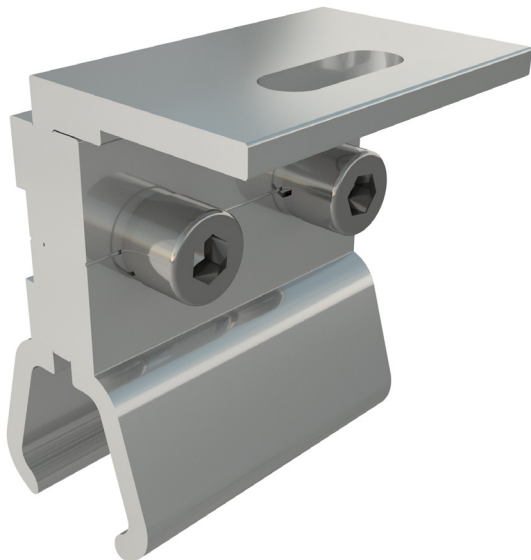

Specifications

- ✓ Part Nr: LM-KS-700-F
- ✓ Material: Aluminium 6005-T5, Stainless steel SUS304
- ✓ Anodized > 13 µm

Features





- ✓ Fast and easy install
- ✓ Attach to popular concealed fix metal roofs without sheet penetration
- ✓ Non-corrosive, durable materials
- ✓ Metallurgical compatibility with most metal roofs
- ✓ Full-rail mounting for PV panels
- ✓ Good ventilation, 100mm clearance between panel frame and roof sheet
- ✓ Fixation of cable trays, walkways and other accessories
- ✓ Convenient installation
- ✓ Resistant to over-tightening as bolts and nuts are stainless steel (no aluminium thread)
- ✓ Single tool fastening

Application

Saflok 700
(Safintra)

Klip-lok 700
(GRS)

Klip-Lok 406
(GRS)

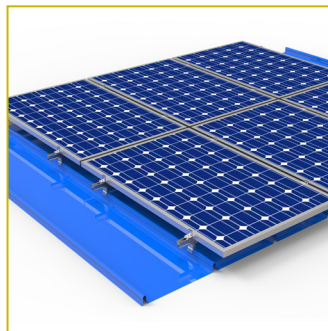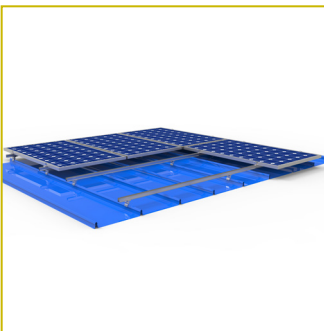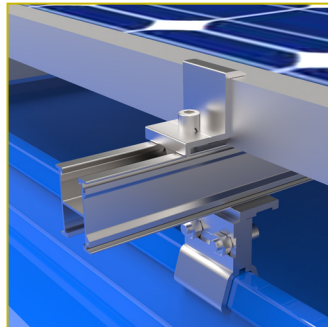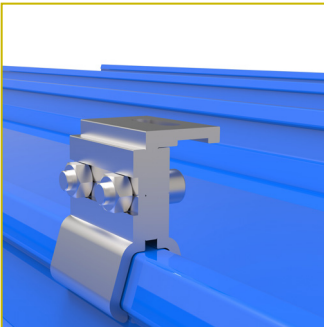

Dimensions



H 68mm x L 55mm x
W 52mm

90g (including fasteners)

Holding strength verified by:

SGS

Lumax Energy
Tel: +27 10 140 4933
Email: energy@lumax.co.za

Address: Unit #3 - Summit Square 1,
347 Roan Crescent, Corporate Park North,
Midrand

www.lumaxenergy.co.za

Lumax
ENERGY