

LM-TBR



Specifications

- ✓ Part Nr: LM-TBR
- ✓ Material: Aluminium 6005-T5, Stainless steel SUS304, EPDM, Vulcanised elastomer
- ✓ Anodized > 13 µm

Features

- ✓ Very fast and easy install
- ✓ Ideal for mounting panels in landscape orientation
- ✓ Advanced screw technology
 - Bi-Metal
 - Sharp Carbon steel tip for easy and skid free piercing
 - Stainless steel head for anti-corrosive durability
 - High torque strip value
 - High pull out value per screw
 - No swarf (metal debris)
- ✓ Durable materials
- ✓ Double gasket for waterproofing, EPDM layer and elastomer washer
- ✓ Compatible grounding washer, mid- and end clamps

Application

Popular trapezoidal and IBR sheets



Available without EPDM for fitting on standing seam roof clamps and other applications.

Dimensions



H 30mm x L 120mm x
W 30mm

66g (including screws)

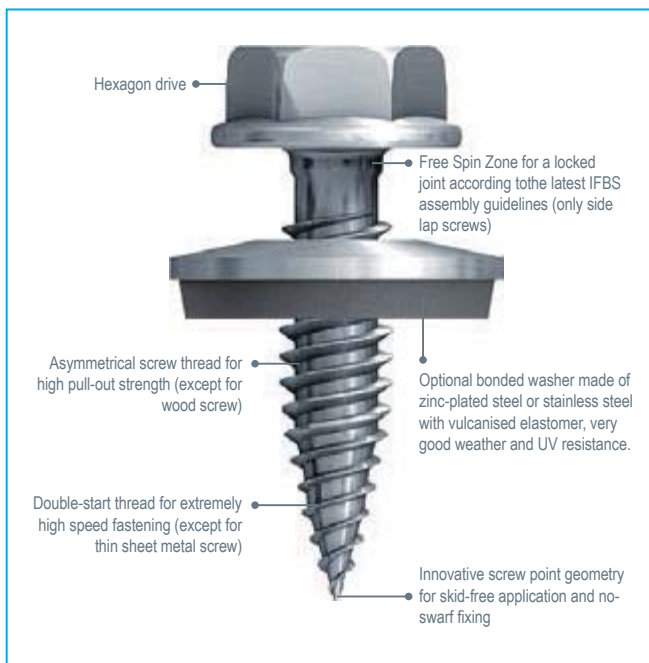

Holding strength verified by:



Lumax Energy
Tel: +27 10 140 4933
Email: energy@lumax.co.za

Address: Unit #3 - Summit Square 1,
347 Roan Crescent, Corporate Park North,
Midrand

www.lumaxenergy.co.za

